


▶ AWM Mini Digital Torque Wrench

Product Description

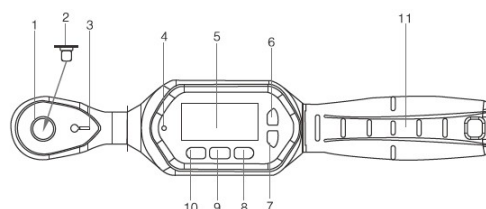

Features

- It has a large screen and backlight.
- Accuracy is 2% in clockwise direction and 2.5% in counterclockwise direction. (20% to 100% of the full measuring range).
- Clockwise and counterclockwise both can be operated.
- The buzzer and LED indicator light are triggered when the preset torque value is reached. (peak-limited mode).
- Four units: (N.m; kgf.cm; lbf.ft; lbf.in).
- Three measuring modes: real-time mode, peak mode and preset mode.
- 999 records can be stored.
- Automatic shutdown within 5 minutes.

1. Quick separation button
2. Ratchet head (back side)
3. Steering shifting sheet
4. LED indicator lamp
5. LCD screen
6. Upward button
7. Power on/Zero button
8. Confirm button
9. Menu button
10. Downward button
11. Grip

Technical Data

Model (with no communication)	AWM-10	AWM-30	AWM-60	AWM-100
Minimum division value	0.01			0.1
Maximum operating range(N.m)	10N.m/7.37ft.lb/ 88.50in.lb/101.97 kgf.cm	30N.m/22.12ft.lb /265.5in.lb/305.9 1kgf.cm	60N.m/44.25ft.lb /531.04in.lb/611. 82kgf.cm	100N.m/73.7ft.lb /885.0in.lb/1019. 7kgf.cm
Connector(inches)	1/4		3/8	1/2
Setting range of buzzer(N.m)	0.3~10	0.9~30	1.8~60	3~100
Length(mm)	230		240	285
Accuracy*1	Clockwise: $\pm 2\%$; Counterclockwise: ± 2.5			
Data storage capacity	999			
Operating mode	Peak mode(P)/ Real-time mode(T)/ Preset mode(Pre)			
Unit	N.m, kgf.cm, lbf.ft, lbf.in			
Form of ratchet head	Bidirectional ratchet head			
Number of ratchet teeth	72 teeth			
Number of button	5			
Power	2 sets of AAA battery			
Operating temperature	$-10^{\circ}\text{C}\sim 60^{\circ}\text{C}$			
Storage temperature	$-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$			
Test falling height	one meter			
Vibration test condition*2	10G			
Service life test*3	10000 times			

